



**TOILET PARTITIONS**



BUILDING VALUE SINCE 1906



## SELECT THE BEST TOILET PARTITION SYSTEM FOR YOUR PROPERTY'S RESTROOMS.



### **P** Prestige Buildings:

Low to moderate traffic  
Minimal use and abuse  
Architectural design  
Quality materials




### **S** Standard Use Buildings:

Moderate to heavy traffic  
Some heavy use/abuse  
Equipment durability  
Budget-sensitive




### **T** Heavy Traffic Buildings:


Extreme traffic flows  
Vandal-prone/abuse  
Durability over design  
Maintenance savings

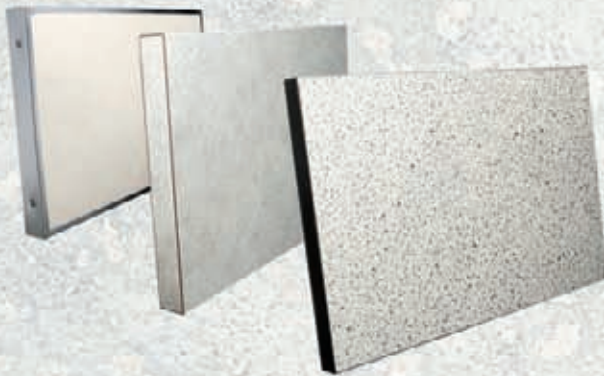

## NEW! TOILET PARTITION PRIVACY OPTIONS



Plan view of Gap-Free door-stile interlocks, not to scale.

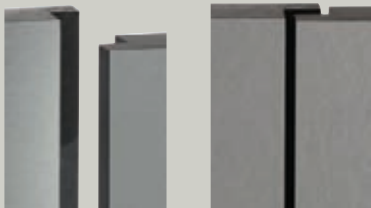

Front views of Gap-Free partition doors, open and closed.



### **GAP-FREE PRIVACY DOORS AND STILES:**

Interlocking design, no sight lines  
Standard or optional full-height hardware  
1090 Sierra and 1080/1180 DuraLine Series Option

Overhead-Braced, Ceiling-Hung, Floor-To-Ceiling;  
Floor-Anchored: 1080/1180 Series only

### **MAXIMUM-HEIGHT COMPARTMENTS:**

72" doors/panels, 4 5/16" floor clearance  
Standard or optional Full-Height hardware  
1090 Sierra and 1080/1180 DuraLine Series Option

Overhead-Braced, Ceiling-Hung, Floor-To-Ceiling,  
Floor-Anchored; 1080/1180 Series only





## THE PRUDENT PROPERTY MANAGER'S BOTTOM LINE IS TWO SHADES OF GREEN.

### BEING GREEN AND SEEING GREEN<sup>SM</sup>

Bobrick is committed to assisting developers, architects and property managers in building and sustaining commercial properties with a sensitivity to long-term durability/functionality, and maintenance/replacement containment. Bobrick's toilet partition materials, in tandem with the Company's substantially recycled stainless steel restroom accessories, are testimony to Bobrick's dedication to helping customers be "green." The most important benefits are good corporate citizenship, positive community relations, and saving money.


### Recycled Content LEED Category MR 4.1/4.2

Particle boards used in the fabrication of 1540, 1040 and 1030 Series Toilet Partitions are 100% recycled pre- and post-consumer waste.

Plastic laminate material used for the 1540, 1040, and 1030 Series is 22% recycled.

Solid phenolic material used for the 1080 and 1180 Series is 22% recycled.

Solid Color Reinforced Composite (SCRC) material used for the 1090 Series is 15% post-consumer and 15% post-industrial recycled content.

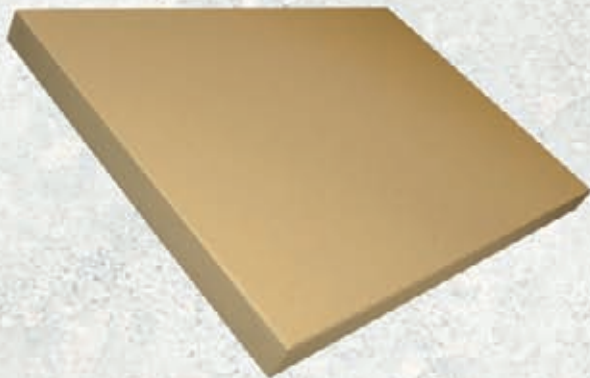

### Local Regional Materials LEED Category MR 5.1/5.2.

Bobrick has four geographically dispersed regional toilet partition manufacturing and distribution centers.

### Rapidly Renewable Material LEED Category MR 6.0.

Plastic Laminate is used for 1540, 1040 and 1030 Series.



### Low Emitting Materials LEED Category EQ 4.4.

Wilsonart Plastic Laminate, Arborite Solid Phenolic and Trespa SCRC materials are GreenGuard<sup>®</sup> Certified.



The stainless steel toilet partition door hardware and mounting brackets of 1030, 1040, 1080, 1090 and 1180 Series are manufactured with type 304 stainless steel containing 50% to 70% post industrial recycled stainless steel content balanced with virgin iron and ferrous alloys.



The GREENGUARD INDOOR AIR QUALITY CERTIFIED<sup>®</sup> MARK is a registered certification mark used under license through the GREENGUARD Environmental Institute.



# Solid Color Reinforced Composite (SCRC)



## 1090 SierraSeries® SOLID COLOR REINFORCED COMPOSITE (SCRC) TOILET PARTITION SYSTEM



Heavy traffic restrooms

Solid color clear through

Superior durability/repairability

Non-ghosting graffiti removal

Class B ASTM E84 Interior Wall  
and Ceiling Finish Classification

LEED Program contribution

Scratch-, dent-, moisture- and  
impact-resistant

10-day RapidResponse® Program:  
4 earthtone colors

10-year Limited Warranty

Doors, stiles ¾" (19mm) thick

Panels ½" (13mm) thick

Dyed wood fibrous material

Reinforced with polycarbonate  
and phenolic resins

# Heavy Duty Stainless Steel Hardware



## STANDARD CONCEALED STAINLESS STEEL HARDWARE

Heavy-gauge type 304 satin-finish stainless steel

Three robust, barrel hinges adjust for partial opening or self closing


Through-bolted panel-to-stile brackets

Reinforced latch, through-bolted keeper

Vandal-resistant door stops

Through-bolted clothes hook

Emergency access door lifts from outside except on outswing door

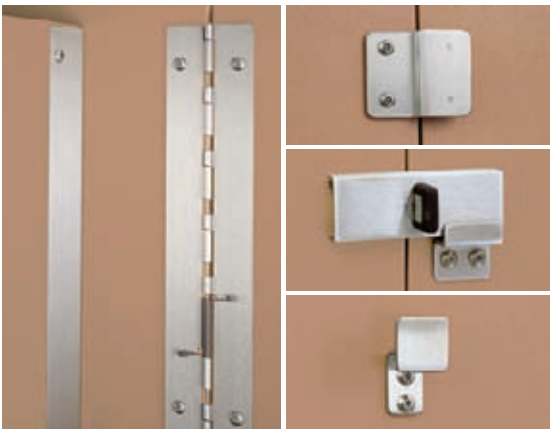

## OPTIONAL FULL-HEIGHT STAINLESS STEEL HARDWARE

Heavy-gauge type 304 satin-finish stainless steel

Self-closing hinge runs full height of door


Through-bolted panel-to-stile angle brackets and U-channels run full height of panels

Vandal-resistant door stops; clothes hook

Reinforced latch with through-bolted keeper

Emergency access door lifts from outside except on outswing door

Add suffix .67 to 1092 Series Number

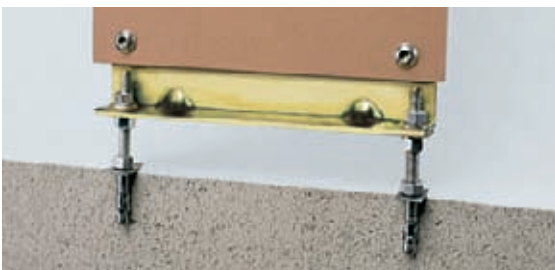


## STILE BASE LEVELING DEVICE

7-gauge steel angle leveling bar factory-installed to stile

$\frac{3}{8}$ " (10mm) diameter stainless steel wedge floor anchors

Patented one-piece shoe conceals stile leveling device

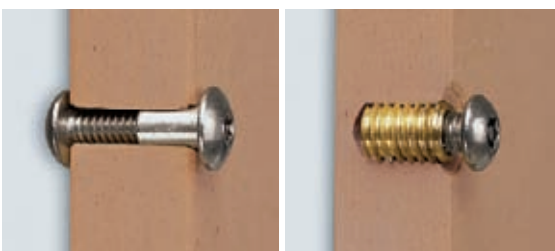

## STANDARD FACTORY-INSTALLED INSERTS, THROUGH-BOLTED HARDWARE

Threaded brass inserts provide metal-to-metal contact for securing door hardware

Through-bolted fasteners attach panel-to-stile brackets, clothes hooks and latch keepers

Vandal-resistant Pin-in-Head Torx Screws



**CLASS B INTERIOR WALL AND CEILING FINISH CLASSIFICATION**

Reference: Technical Bulletin TB-73.



**NON-GHOSTING GRAFFITI REMOVAL**

Reference: Technical Bulletin TB-80.  
Product No. 891099 Graffiti Remover 10 fl oz bottle.



**SCRATCH- AND DENT-RESISTANT**

References: Technical Bulletins TB-78 and TB-79.



**CONTRIBUTES TO LEED CERTIFICATION**

Reference: Technical Bulletin TB-77.



**MOUNTING CONFIGURATIONS**

- 1. Overhead-Braced
- 2. Floor-To-Ceiling
- 3. Ceiling-Hung



Plan view of Gap-Free door-stile interlocks, not to scale.



Front views of Gap-Free partition doors, open and closed.


2098 Series, Ceiling-Hung mounting configuration shown.

**TOILET PARTITION PRIVACY OPTIONS**

- 1. Gap-Free interlocking design, no sight lines.
- 2. Maximum-Height: 72" doors/panels, 4 5/16" floor clearance. See page 2.



**PERFORMANCE COMPARISON: STANDARD UNTREATED HDPE VS. SCRC**

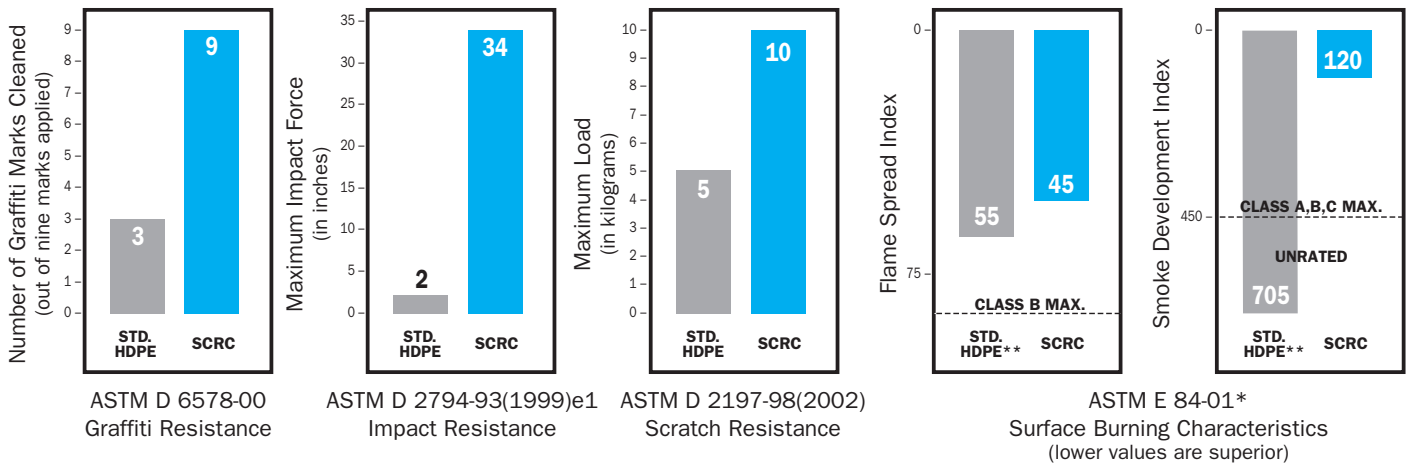

\*Controlled test; not actual fire conditions  
 \*\*Untreated HDPE tested without aluminum heat sinc

**10-DAY RAPID RESPONSE PROGRAM**

- 25 compartments
- Ship 10 workdays after order approval; no extra charge
- 4 standard colors
- Three mounting configurations, two hardware options
- Excludes Gap-Free, Maximum-Height Privacy Options

**HOW TO ORDER:**

1. Pick the color.
2. Select mounting configuration (1090 Series is available in three mounting configurations).
3. Choose the hardware desired: Standard Concealed or Optional Full-Height.
4. Choose the privacy option(s) desired: Gap-Free and/or Maximum-Height.
5. Example: Terra Cotta, Overhead-Braced, Full-Height Hardware, Gap-Free: 1092G.67, SC03.

**1090 SierraSeries PRODUCT SELECTION:**

Mounting Configuration	Standard Hardware		Optional Full-Height Hardware	
		Gap-Free		Gap-Free
Overhead-Braced	1092	1092G	1092.67	1092G.67
Floor-To-Ceiling	1096	1096G	1096.67	1096G.67
Ceiling-Hung	1098	1098G	1098.67	1098G.67

**Maximum-Height Doors and Panels:** Change Series Number from 1090 to 2090.  
 Example: Overhead-Braced, Full-Height Hardware, Maximum-Height Doors and Panels: 2092.67

**EARTHTONE COLOR COLLECTION**

Now you can brighten your restrooms with SierraSeries contemporary earthtones, and with GraffitiOff Surface you no longer need black toilet partitions to minimize the partial or unsuccessful removal of graffiti.




SC01 Golden Khaki SC02 Desert Beige SC03 Terra Cotta SC04 Forest Green

**IMPORTANT NOTE:** Minor edge nicks and random color variations are a normal consequence of manufacturing material containing natural fibers. SierraSeries Solid Color Reinforced Composite (SCRC) colors are printed reproductions and are for descriptive purposes only. Request actual color samples for color confirmation.



# Solid Phenolic

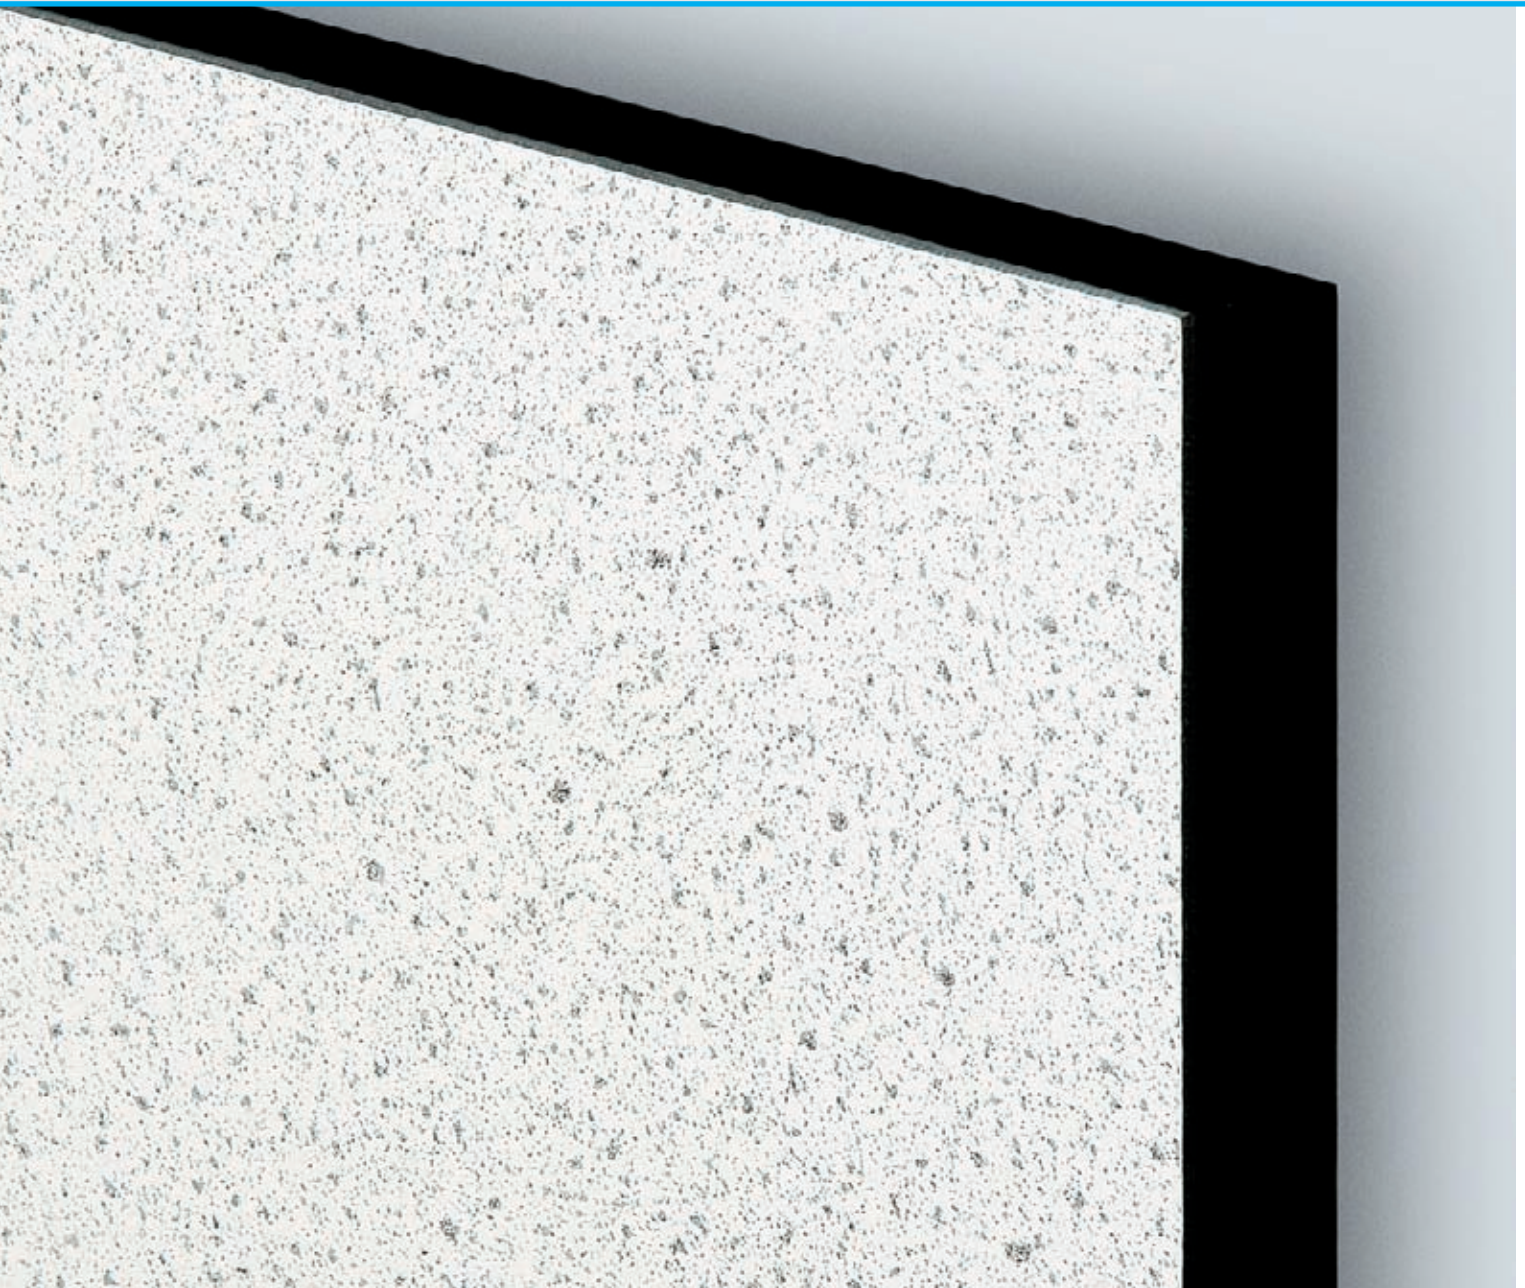

## 1080/1180 DuraLineSeries® SOLID PHENOLIC TOILET PARTITION SYSTEM



Combines durability and distinction for moderate- and heavy-traffic restrooms

Solid-core construction

Architectural black edge design

Non-ghosting graffiti removal

Class A or B ASTM E84 Interior Wall and Ceiling Finish Classification

Scratch-, dent-, moisture- and impact-resistant

10-day RapidResponse Program: 18 standard colors and patterns

15-year Limited Warranty

Doors, stiles  $\frac{3}{4}$ " (19mm) thick

Panels  $\frac{1}{2}$ " (13mm) thick

Bonded Solid Phenolic core is multiple layers of resin-impregnated kraft paper

Color and clear Melamine surface sheets



# Heavy Duty Stainless Steel Hardware



## STANDARD CONCEALED STAINLESS STEEL HARDWARE

Heavy-gauge type 304 satin-finish stainless steel

Three robust, barrel hinges adjust for partial opening or self closing

Slide latch with keeper

Convenient clothes hook

Emergency access door lifts from outside except on outswing door



## OPTIONAL FULL-HEIGHT STAINLESS STEEL HARDWARE

Heavy-gauge type 304 satin-finish stainless steel

Self-closing hinge runs full height of door

Angle brackets and U-channels run full height of panels

Vandal-resistant door stops

Reinforced latch and keeper; clothes hook

Emergency access door lifts from outside except on outswing door

Add suffix .67 to 1080/1180 Series Number




## STILE BASE LEVELING DEVICE

7-gauge steel angle leveling bar factory-installed to stile

$\frac{3}{8}$ " (10mm) diameter stainless steel wedge floor anchors

Patented one-piece shoe conceals stile leveling device

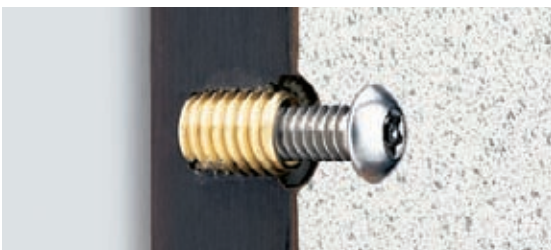

## STANDARD FACTORY-INSTALLED INSERTS

Threaded brass inserts provide metal-to-metal contact for securing door hardware

Inserts withstand over 1500 lbs (6672 N) of pull-out force

Vandal-resistant Pin-in-Head Torx Screws



**CLASS A OR B INTERIOR WALL AND CEILING FINISH CLASSIFICATION**

Reference: Technical Bulletin TB-73.



**NON-GHOSTING GRAFFITI REMOVAL**

Reference: Technical Bulletin TB-80.

Product No. 891099 Graffiti Remover 10 fl oz bottle.



**SCRATCH- AND IMPACT-RESISTANT**

References: Technical Bulletin TB-78 and TB-79.



**MOISTURE-RESISTANT**

Withstands hose-down maintenance and environmental moisture.



**MOUNTING CONFIGURATIONS**

1. Floor-Anchored 2. Overhead-Braced 3. Floor-To-Ceiling 4. Ceiling-Hung



Plan view of Gap-Free door-stile interlocks, not to scale.



1 Front views of Gap-Free partition doors, open and closed.





2 2081 Series, Floor-Anchored mounting configuration shown.


**TOILET PARTITION PRIVACY OPTIONS**

1. Gap-Free interlocking design, no sight lines.
2. Maximum-Height: 72" doors/panels, 4 5/16" floor clearance. See page 2.




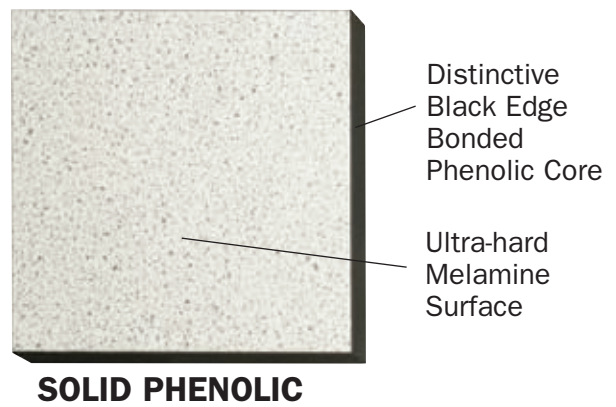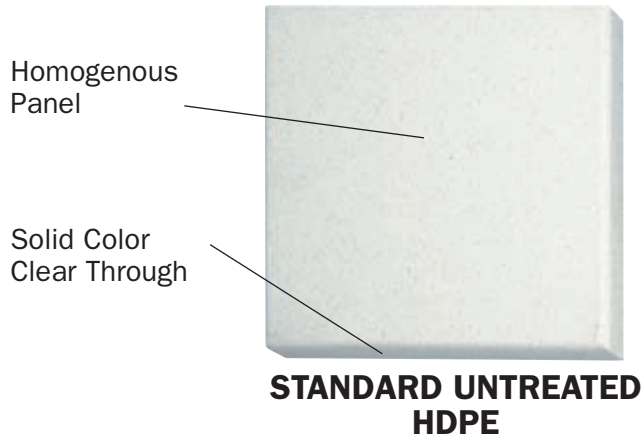


**PERFORMANCE COMPARISON: STANDARD UNTREATED HDPE VS. SOLID PHENOLIC**

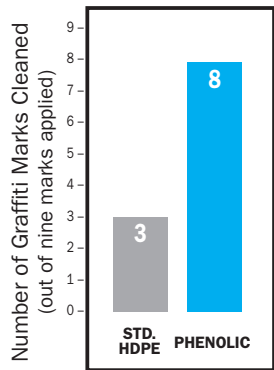


ASTM D 6578-00  
Graffiti Resistance

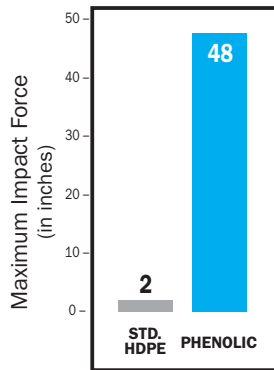


ASTM D 2794-93(1999)e1  
Impact Resistance

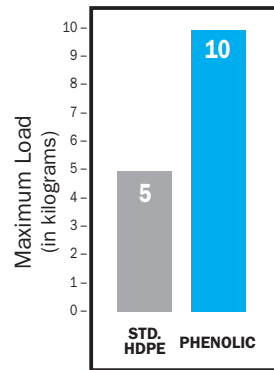

ASTM D 2197-98(2002)  
Scratch Resistance

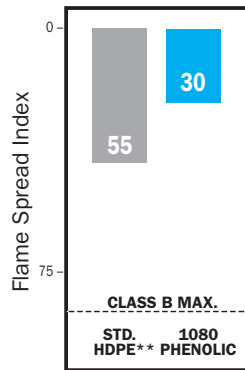

ASTM E 84-01\*  
Surface Burning Characteristics  
(lower values are superior)

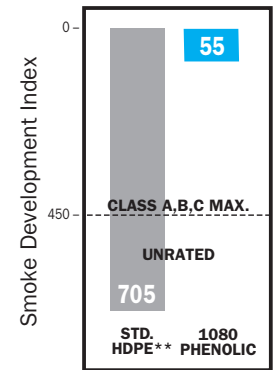

\*Controlled test; not actual fire conditions \*\*Untreated HDPE tested without aluminum heat sink

**10-DAY RAPID RESPONSE PROGRAM**

- 25 compartments, 1080 Series only.
- Ship 10 workdays after order approval; no extra charge
- 18 standard Solid Phenolic colors and patterns
- Four mounting configurations, two hardware options
- Excludes 1180 Series, Gap-Free and Max. Ht. Privacy Options

**HOW TO ORDER:**


1. Pick the color or pattern.
2. Select Interior Wall and Ceiling Finish Classification (A: 1180 Series, B: 1080 Series).
3. Select mounting configuration (Solid Phenolic is available in four mounting configurations).
4. Choose the hardware desired: Standard Concealed or Optional Full-Height.
5. Choose the privacy option(s) desired: Gap-Free and/or Maximum-Height.
6. Example: Antique White, Class B, Overhead-Braced, Full-Height Hardware, Gap-Free: 1082G.67, S-463.

**Maximum-Height Doors and Panels:** Change Series Number from 1080/1180 to 2080/2180. Example: Class B Solid Phenolic, Ceiling-Hung, Optional Full-Height Hardware, Maximum-Height Doors and Panels, Gap-Free: 2088G.67

**1080/1180 DuraLineSeries PRODUCT SELECTION:**


Mounting Configuration	Standard Hardware		Optional Full-Height Hardware	
		Gap-Free		Gap-Free
Floor-Anchored	1081/1181	1081G/1181G	1081.67/1181.67	1081G.67/1181G.67
Overhead-Braced	1082/1182	1082G/1182G	1082.67/1182.67	1082G.67/1182G.67
Floor-To-Ceiling	1086/1186	1086G/1186G	1086.67/1186.67	1086G.67/1186G.67
Ceiling-Hung	1088/1188	1088G/1188G	1088.67/1188.67	1088G.67/1188G.67

**STANDARD SOLID PHENOLIC COLORS:**

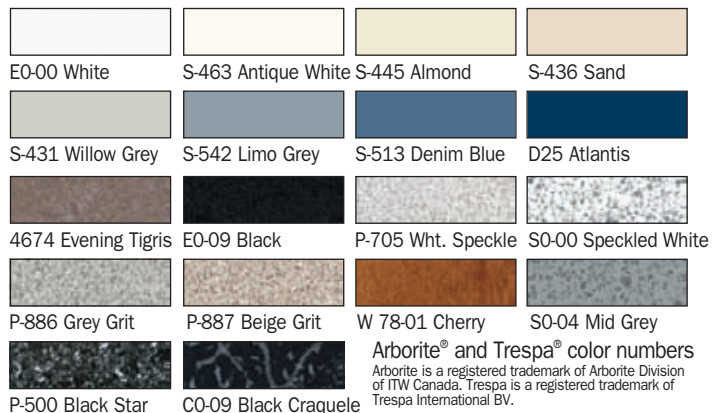

**IMPORTANT NOTE:** Woodgrain partitions have vertical grain direction only. Woodgrain panels wider than 72" (1830mm) are in two pieces with a field-installed aluminum "H" channel covering the seam, furnished at an additional charge. Solid Phenolic Colors are printed reproductions and are for descriptive purposes only. Refer to manufacturer's samples for absolute color fidelity. Color Guide and samples available on request. Additional colors are available and may be subject to extra charges, longer lead times.

# Plastic Laminate

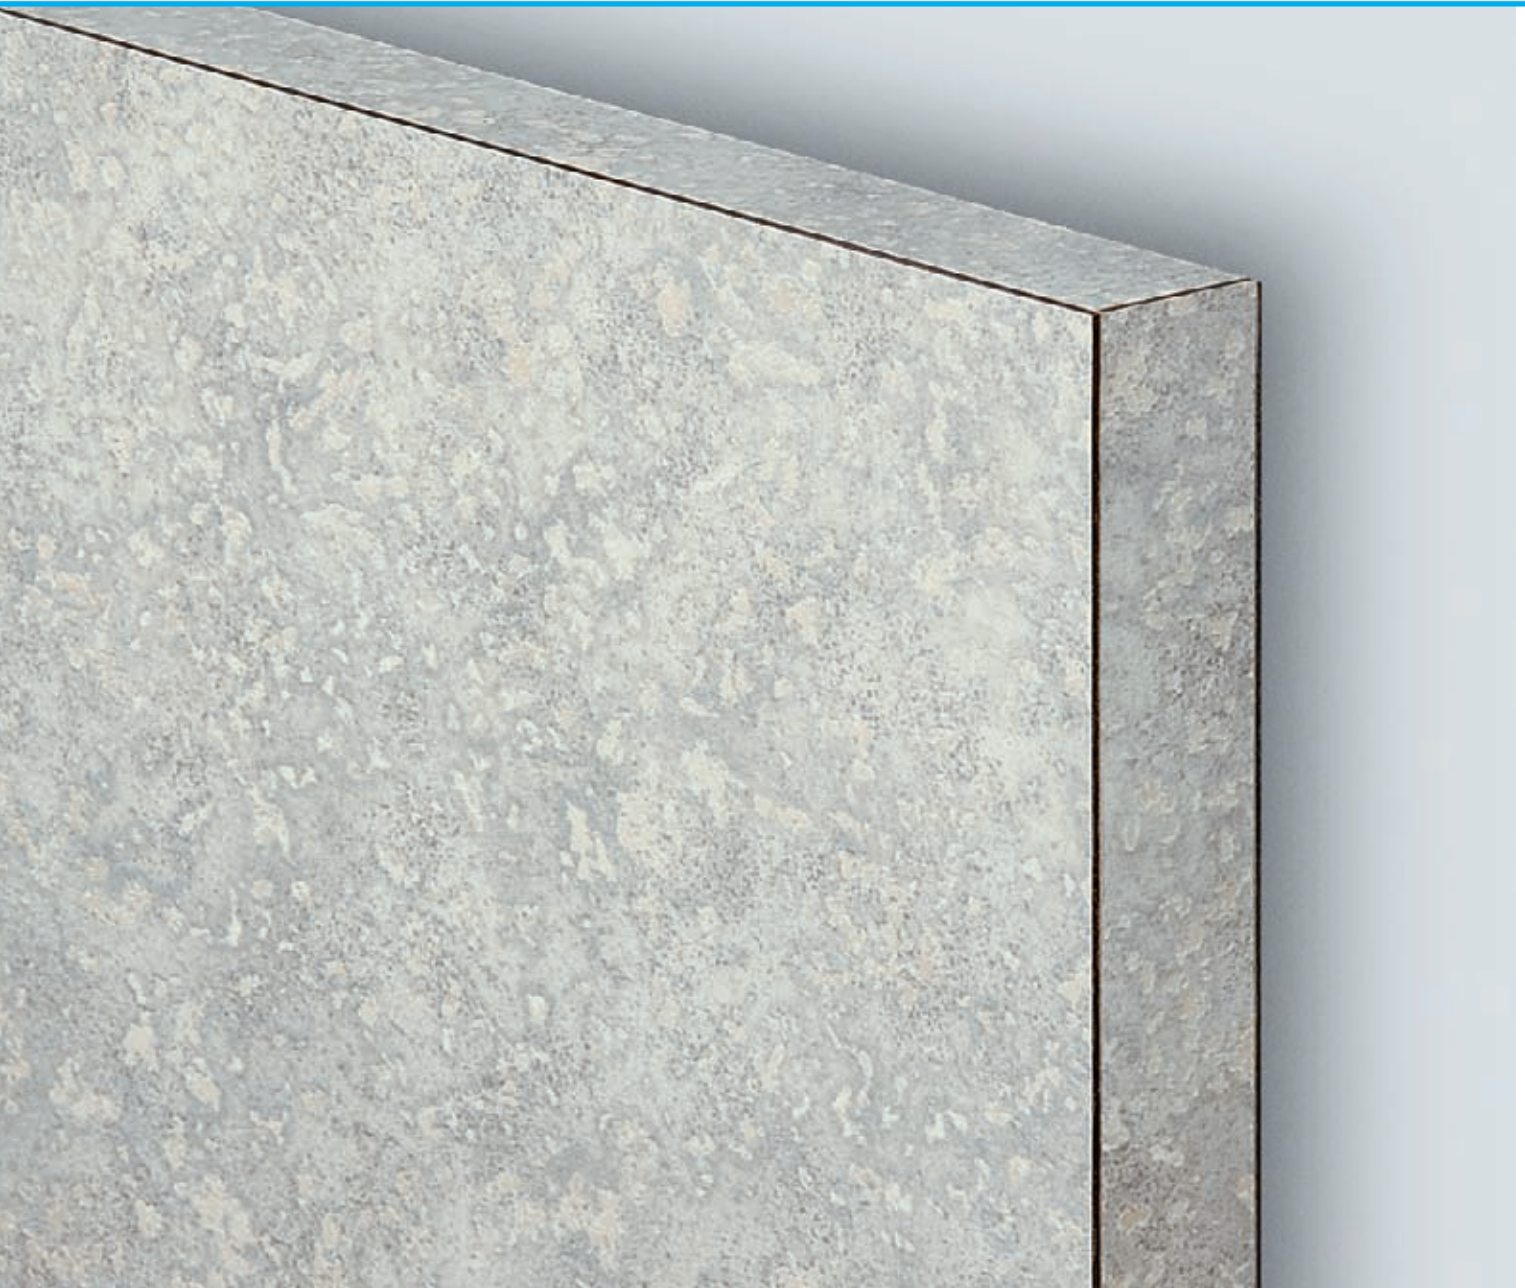

## 1540 ClassicSeries™ PLASTIC LAMINATE TOILET PARTITION SYSTEM



Moderate-use restrooms

Budget-sensitive projects

Industrial-grade particle board core

High-pressure plastic laminate edges  
and surfaces

Class B ASTM E84 Interior Wall and  
Ceiling Finish Classification

Scratch-, dent- and impact-resistant

Doors, panels, stiles 1" (25mm) thick

10-day Rapid⚡Response Program: 35 standard  
colors and patterns (See page 18)

20-day Fast⚡Color™ Plastic Laminate Program:  
400+ colors and patterns (See page 19)

1-year Limited Warranty




# Zamak and Heavy-Duty Stainless Steel Hardware



## STANDARD THROUGH-BOLTED ZAMAK HARDWARE

Hinges, latch, keeper, coat hook, mounting hardware are polished chrome-plated Zamak. For emergency access door lifts from outside. Patented one-piece stainless steel shoe conceals stile leveling device.

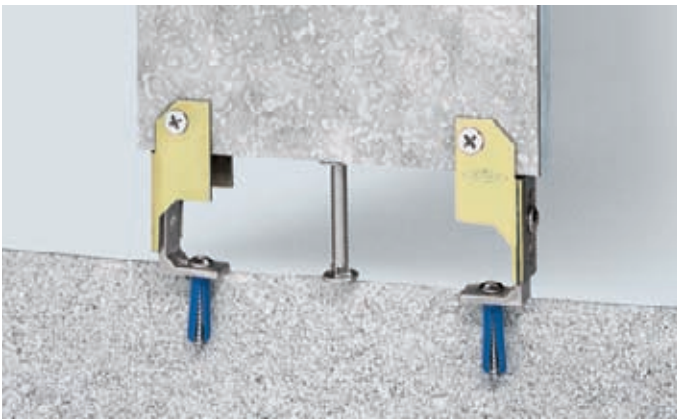

## STANDARD OVERHEAD-BRACED STILE BASE, LEVELING DEVICE

12-gauge plated steel brackets attached to bottom of stile. Furnished with leveling bolt, floor "L" brackets, screws, plastic anchors.



## OPTIONAL THROUGH-BOLTED STAINLESS STEEL HARDWARE

Heavy-duty, cast type 304 stainless steel hinges, clothes hook, emergency access door keeper. Stainless steel mounting brackets and shoe. Add suffix .64 to 1540 Series Number.



## STANDARD FLOOR-ANCHORED STILE BASE, LEVELING DEVICE

$\frac{3}{8}$ " (10mm) thick plated steel leveling bar factory-installed to stile. Furnished with  $\frac{3}{8}$ " (10mm) diameter stainless steel wedge floor anchors.



## OPTIONAL STEEL-CORE STILE AND WELDED LEVELING DEVICE

11-gauge steel stile core welded to  $\frac{3}{8}$ " (10mm) thick plated steel leveling bar forms single structural unit. Add suffix .63 to 1540 Series Number.

## DESIGNER'S NOTE:

Classic, Designer and TrimLine Series are not recommended for heavy traffic and vandal-prone restrooms, moisture-prone spaces or hose-down maintenance. SierraSeries and DuraLineSeries toilet partitions are recommended for these restroom conditions.



**CLASS B INTERIOR WALL AND CEILING FINISH CLASSIFICATION**

Reference: *Technical Bulletin TB-73.*




**NON-GHOSTING GRAFFITI REMOVAL**

Reference: *Technical Bulletin TB-80.*  
Product No. 891099 Graffiti Remover 10 fl oz bottle.



**SCRATCH-RESISTANT**

Reference: *Technical Bulletin TB-79.*

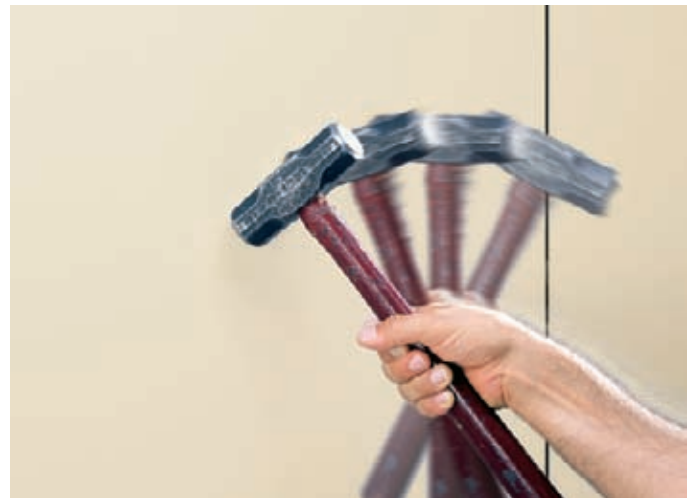

**IMPACT-RESISTANT**

Reference: *Technical Bulletin TB-78.*



1



2



3

**MOUNTING CONFIGURATIONS**

- 1. Floor-Anchored
- 2. Overhead-Braced
- 3. Ceiling-Hung




Photograph not to scale;  
headrail and shoes not shown.


**EXPOSED HARDWARE**

Front view of 1540 ClassicSeries shown.



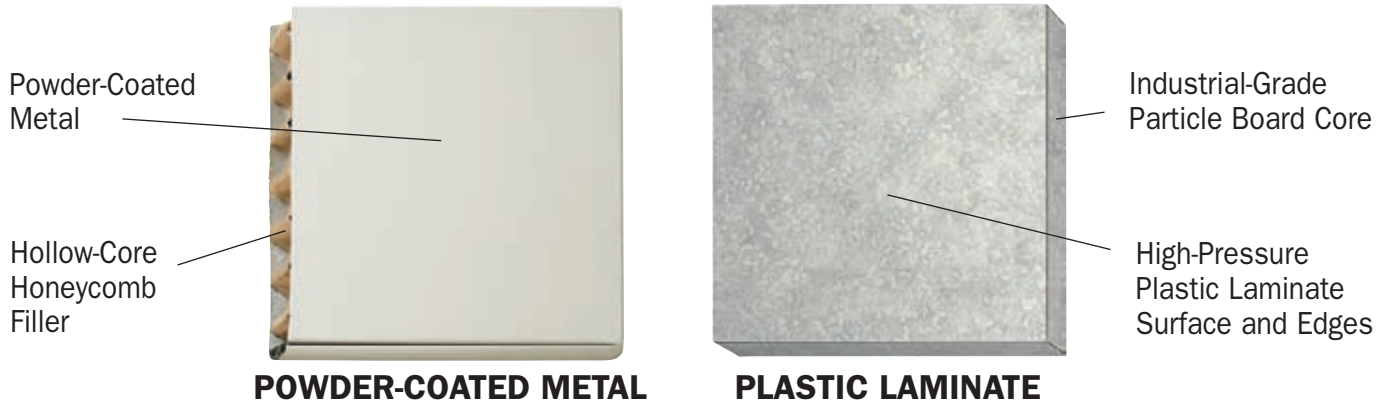

**PERFORMANCE COMPARISON: POWDER-COATED METAL VS. PLASTIC LAMINATE**

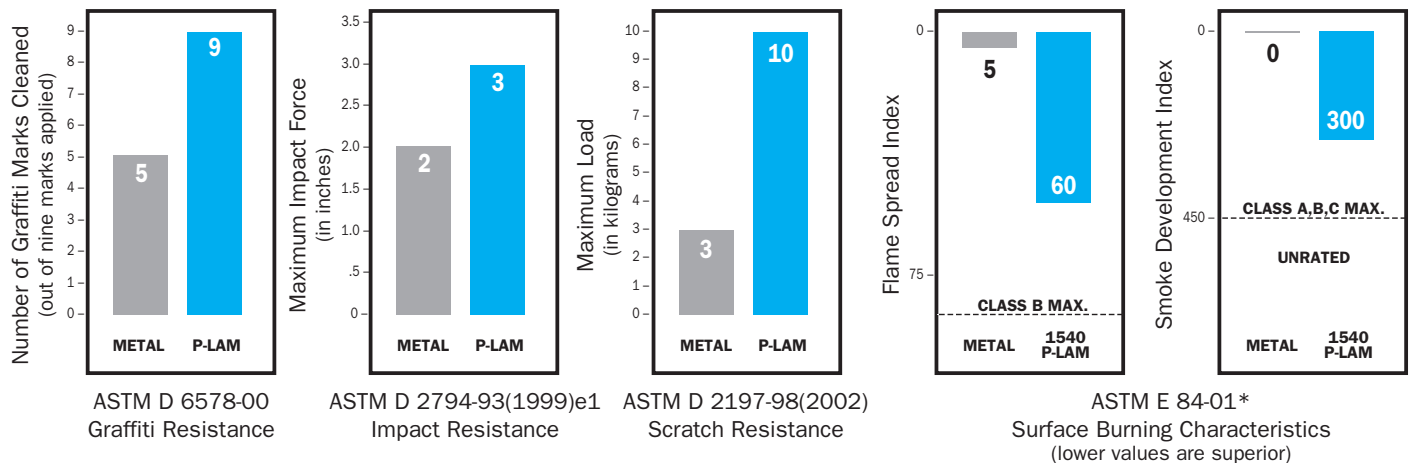

\*Controlled test; not actual fire conditions.

**HOW TO ORDER:**

- Pick the color or pattern, see pages 18 and 19.
- Select mounting configuration (1540 Series is available in three mounting configurations).
- Select the stile core/base desired: Standard or Optional Steel Core Stile and Welded Leveling Device.
- Choose the hardware desired: Standard Zamak or Optional Stainless Steel.
- Example: Designer White, Overhead-Braced, Steel Core Stile and Welded Leveling Device and Stainless Steel Hardware: 1542.63/.64, D354.

**1540 ClassicSeries PRODUCT SELECTION:**

Mounting Configuration	Standard Hardware	Optional Steel Core Stile, Welded Leveling Device	Optional Stainless Steel Hardware	Optional Steel Core Stile, Welded Leveling Device; Stainless Steel Hardware
Floor-Anchored	1541	1541.63	1541.64	1541.63/.64
Overhead-Braced	1542	1542.63	1542.64	1542.63/.64
Ceiling-Hung	1548	1548.63	1548.64	1548.63/.64

**10-DAY RAPID RESPONSE PROGRAM, 20-DAY FAST COLOR PROGRAM**  
See pages 18 and 19.





**1040 DesignerSeries™**  
 .050" (1mm) thick plastic laminate edges and surfaces.



**1030 TrimLineSeries™**  
 Satin-finish stainless steel edge trim routed flush with plastic laminate surfaces.




**STANDARD CONCEALED STAINLESS STEEL HARDWARE**  
 Two satin-finish adjustable barrel hinges, slide latch with keeper, clothes hook; emergency access.



**OPTIONAL FULL-HEIGHT STAINLESS STEEL HARDWARE**  
 Self-closing hinge, brackets, U-channels, door stops, latch and keeper; clothes hook. Add suffix .65.



**STANDARD STEEL-CORE STILE AND WELDED LEVELING DEVICE**  
 Steel-core stile welded to steel leveling bar.

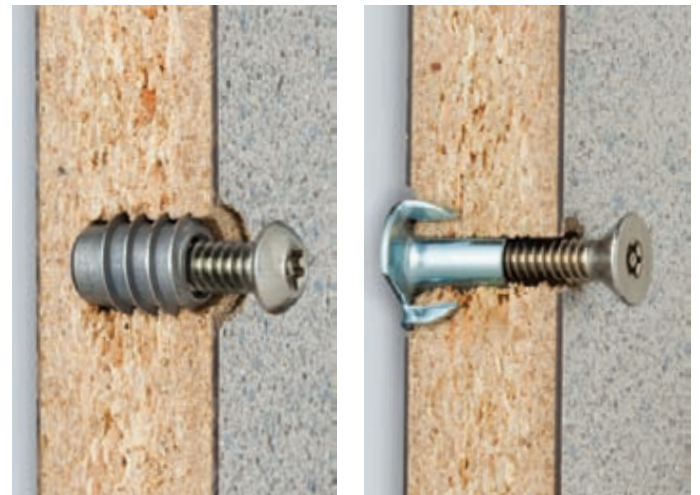

**THREADED INSERTS, T-NUTS**  
 Factory installed. Provide metal-to-metal contact for securing door hinges and latch track.



**HOW TO ORDER 1040 SERIES:**

1. Pick the color or pattern, see pages 18 and 19.
2. Select mounting configuration (1040 Series is available in three mounting configurations: Floor-Anchored, Overhead-Braced, Ceiling-Hung).
3. Choose the hardware desired: Standard Concealed or Optional Full-Height.
4. Example: Grey Glace, Floor-Anchored, Full-Height Hardware: 1041.65, 4142.

**1040 DesignerSeries PRODUCT SELECTION:**

Mounting Configuration	Standard Hardware	Optional Full-Height Hardware
Floor-Anchored	1041	1041.65
Overhead-Braced	1042	1042.65
Ceiling-Hung	1048	1048.65

**HOW TO ORDER 1030 SERIES:**

1. Pick the color or pattern, see pages 18 and 19.
2. Select mounting configuration (1030 Series is available in three mounting configurations: Floor-Anchored, Overhead-Braced, Ceiling-Hung).
3. Choose the hardware desired: Standard Concealed or Optional Full-Height.
4. Example: Tungsten EV, Overhead-Braced, Full-Height Hardware: 1032.65, 4814.

**1030 TrimLineSeries PRODUCT SELECTION:**

Mounting Configuration	Standard Hardware	Optional Full-Height Hardware
Floor-Anchored	1031	1031.65
Overhead-Braced	1032	1032.65
Ceiling-Hung	1038	1038.65

**DESIGNER'S NOTE 1040 SERIES:**

Per ASTM E84 tests:  
 Flame-spread index – 60  
 Smoke-developed index – 195  
 Meets Class B ASTM E84 Interior Wall and Ceiling Finish Classification  
 See Bobrick Advisory Bulletin TB-73


**DESIGNER'S NOTE 1030 SERIES:**

Per ASTM E84 tests:  
 Flame-spread index – 60  
 Smoke-developed index – 265  
 Meets Class B ASTM E84 Interior Wall and Ceiling Finish Classification  
 See Bobrick Advisory Bulletin TB-73

**10-DAY RAPID RESPONSE PROGRAM, 20-DAY FAST COLOR PROGRAM**

See pages 18 and 19.

**CONCEALED HARDWARE**

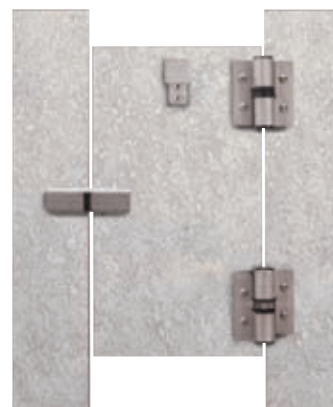

Photographs not to scale; headrail and shoes not shown.

**FRONT VIEW**

1040 Designer (shown) and 1030 TrimLine Series.

**INSIDE VIEW**

1040 Designer (shown) and 1030 TrimLine Series.

**SHOWER DIVIDERS, DRESSING COMPARTMENTS, URINAL SCREENS**



**OVERHEAD-BRACED SHOWER DIVIDERS** Shower curtain track and hooks in headrail.

Coordinate urinal, entrance screens, shower dividers and dressing compartments with toilet partitions. Select 1092 or 1080/1180 shower dividers and dressing compartments for wet-areas. Overhead-braced configuration can be furnished with shower curtains, curtain track and hooks concealed in headrail.



**WALL-HUNG, FLOOR-ANCHORED, POST-TO-CEILING SCREENS**

**HOW TO ORDER:**

1. Pick the color or pattern, see pages 7, 11, 18 and 19.
2. Select the product (Shower Divider, Dressing Compartment, Urinal Screen).
3. Choose the Series (Classic, Designer, TrimLine, DuraLine, Sierra).
4. Select the mounting configuration.
5. Example: Brittany Blue, Urinal Screen, Classic Series, Wall-Hung: 1545, D321.

**SHOWER DIVIDERS, DRESSING COMPARTMENTS, AND URINAL SCREENS PRODUCT SELECTION:**

Series	Shower Dividers Overhead-Braced	Dress.Comp. Overhead-Braced	Urinal Screen Configurations			
			Floor-Anchored	Post-to-Ceiling	Wall-Hung	Ceiling-Hung
<b>ClassicSeries</b>	NR	1542	1541	N/A	1545	1548
<b>DesignerSeries</b>	NR	1042	1041	1043	1045	1048
<b>TrimLineSeries</b>	NR	1032	1031	1033	1035	1038
<b>DuraLineSeries</b>	1082/1182	1082/1182	1081/1181	1083/1183	1085/1185	1088/1188
<b>SierraSeries</b>	1092	1092	N/A	1093	1095	N/A

NR: Not recommended for wet areas. N/A: Not available.

[bobrick.com/PlasticLaminateColors](http://bobrick.com/PlasticLaminateColors)

**STANDARD PLASTIC LAMINATE COLORS AND PATTERNS:** All Wilsonart® color numbers

D354 Des. Wht	1573 Frosty Wht	1500 Grey	D315 Platinum	4674 Eve Tigris	D91 Slate Grey	1572 Antq. White	D30 Nat. Almond
1530 Beige	D97 Haze	D50 Khaki Brn	4841 Des Zphyr	D96 Shadow	D14 Port	D321 Brit. Blue	D25 Atlantis
1595 Black	4621 Wht. Neb.	4142 Grey Glace	4622 Grey Neb.	4623 Grpht. Neb.	4794 Wndspt Brz	4608 Cald. Beige	4143 Neut. Glace
4814 Tungsten EV	4669 Nat. Tigris	4738 Ochre Rolet.	1787 Oxide	7054 Wld Cherry	7040A Fig. Mhgnly	4624 Beige Neb.	4632 Teal Neb.
4630 Cloud Neb.	4759 Mystq. Mrn.	4552 Ebony Star					

**10-DAY RAPID RESPONSE® TOILET PARTITION ORDER FULFILLMENT PROGRAM**


Series	Max. No. Cmpts.	Colors	Mounting	Ready For Shipment
1540	25	35	*	<b>10 Workdays After Order Approval</b>
1030	25	35	*	
1040	25	35	*	
1080	25	18	All	
1090	25	4	**	

**IMPORTANT NOTE:** Woodgrain partitions have vertical grain direction only. Woodgrain panels wider than 60" (1525mm) will be spliced, joining the two pieces onto the particle board core for an additional charge. Plastic Laminate Colors above are printed reproductions and are for descriptive purposes only. Refer to manufacturer's samples for absolute color fidelity. Color Guide and samples are available from Bobrick on request. Additional colors are available and may be subject to extra charges and longer lead times.

\*Ceiling-Hung, Floor-Anchored and Overhead-Braced; not available in Floor-To-Ceiling.  
 \*\*Overhead-Braced, Floor-To-Ceiling and Ceiling-Hung; not available in Floor-Anchored.  
 1180 Series, Gap-Free and Maximum-Height Privacy Options not available with Rapid Response.



**NEW! 20-DAY FASTCOLOR™ 400+ PLASTIC LAMINATE TOILET PARTITION PROGRAM**

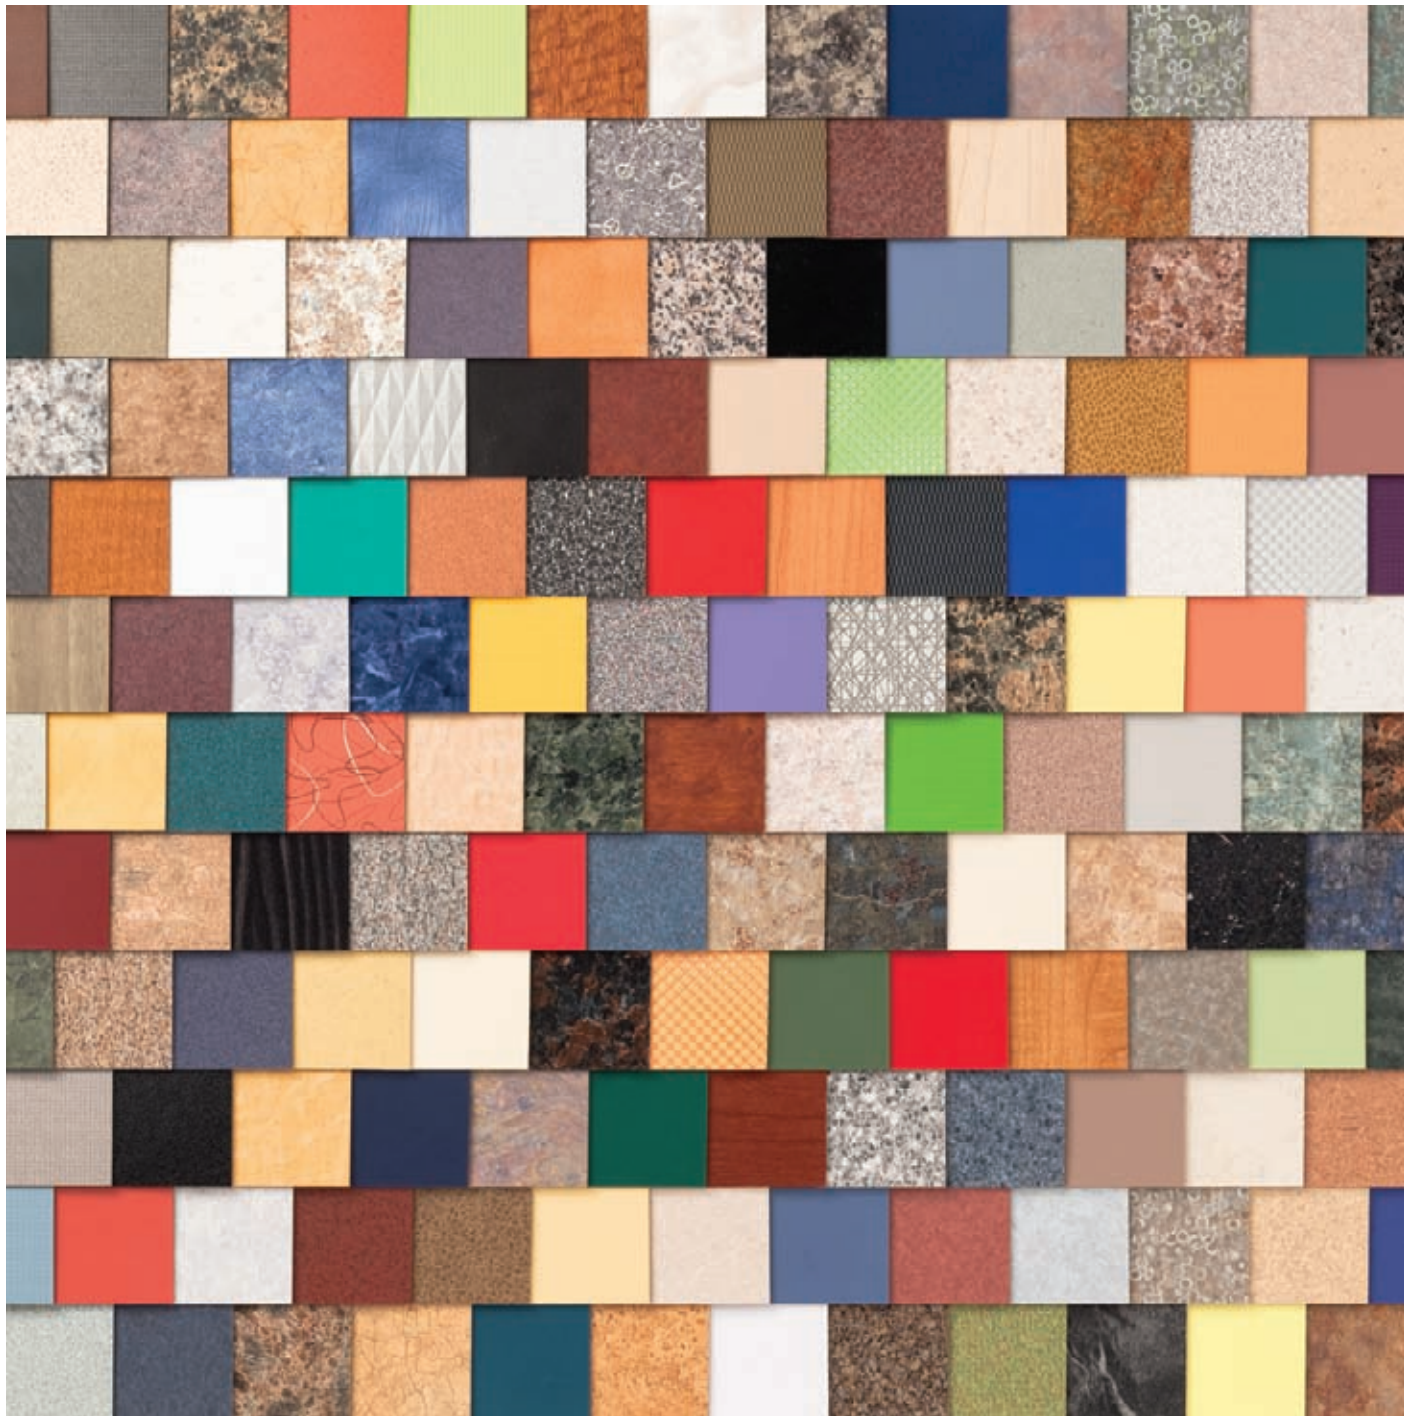

**20-DAY FASTCOLOR PROGRAM**

- 15 compartments
- Ship 20 workdays after order approval
- 400+ Wilsonart, Formica, Nevamar standard, stocked colors
- Three mounting configurations (Ceiling-Hung, Floor-Anchored, Overhead-Braced)
- Two hardware options
- Three Series (1540, 1040, 1030; there is a longer lead time for 1030 Series in Canada)

**NUMBER OF COLORS AND PATTERNS BY MANUFACTURER:**

Wilsonart: 171 Formica: 129 Nevamar: 120



Color submittals download from: • [www.wilsonart.com](http://www.wilsonart.com)

• [www.formica.com](http://www.formica.com) • [www.nevamar.com](http://www.nevamar.com)

**BOBRICK'S iBOB ORDER ENTRY SYSTEM ON BOBRICK.COM:**

- Instant confirmation of color or pattern availability.
- Immediate electronic job quotation to distributor.

Wilsonart, Formica and Nevamar are registered trademarks of Wilsonart International, Formica Corporation and Panolam Industries respectively



## NEAR TO YOU

*Bobrick's North American network of manufacturing, customer service and distribution facilities provides responsive customer support from four strategic locations.*

### COMPANY DIRECTORY:

**Los Angeles:** 11611 Hart Street  
North Hollywood, California 91605-5882  
Washroom Accessories: (818) 982-9600, FAX: (818) 503-1102  
e-mail: [customerservicela@bobrick.com](mailto:customerservicela@bobrick.com)  
Toilet Partitions: (818) 982-9070; FAX: (818) 503-9287  
e-mail: [lacspartitions@bobrick.com](mailto:lacspartitions@bobrick.com)

**Jackson, TN:** 100 Bobrick Drive  
Jackson, TN 38301-5625  
Washroom Accessories: (731) 424-7000, FAX: (731) 424-7800  
e-mail: [customerservicetn@bobrick.com](mailto:customerservicetn@bobrick.com)  
Toilet Partitions: (731) 424-7000, FAX: (731) 265-0578

**New York:** 200 Commerce Drive  
Clifton Park, NY 12065-1350  
(518) 877-7444; FAX: (518) 877-5029  
e-mail: [customerservicenyc@bobrick.com](mailto:customerservicenyc@bobrick.com)

**Canada:** Bobrick Washroom Equipment Company  
45 Rolark Drive, Scarborough, Ontario M1R 3B1  
(416) 298-1611; FAX: (416) 298-6351  
e-mail: [customerserviceto@bobrick.com](mailto:customerserviceto@bobrick.com)

**International Sales:** 11611 Hart Street  
North Hollywood, California 91605-5882  
(818) 764-1000; FAX: (818) 503-9941  
e-mail: [international@bobrick.com](mailto:international@bobrick.com)

**Australia:** Bobrick Washroom Equipment Pty. Ltd.  
+1 (818) 764-1000; FAX: +1 (818) 503-9941  
e-mail: [international@bobrick.com](mailto:international@bobrick.com)

**Germany:** Bobrick Washroom Equipment  
+1 (818) 764-1000; FAX: +1 (818) 503-9941  
e-mail: [info@bobrick.de](mailto:info@bobrick.de)

**United Kingdom:** Bobrick Washroom Equipment Ltd.  
+44 (0)20 8366 1771; FAX: +44 (0)20 8363 5794  
e-mail: [uksales@bobrick.com](mailto:uksales@bobrick.com)

Bobrick products are protected under one or more of the following Patent Numbers. **Canada:** 2196729; **United States:** 7520022, 7032351, 6443411, 5660011. Other patents pending.

See Bobrick's Washroom Accessories Catalog to find products that meet the occupancy needs of a variety of building types.



## ORDER YOUR TEST KIT TODAY

*Compare Solid Color Reinforced Composite (SCRC) with solid plastic. Telephone (800) 553-1600 or visit [www.bobrick.com](http://www.bobrick.com) for a complimentary test kit.*

### BOBRICK PRODUCT WARRANTIES AND LIMITATIONS:

#### Product Warranties

The following Bobrick toilet partition panels, doors and stiles are warranted against breakage, corrosion, delamination and defects in workmanship from the date of purchase for the periods set forth below (this limited warranty is conditioned on the toilet partitions being properly installed, used and serviced):

Toilet Partitions	Limited Warranty
SierraSeries, 1090	10 years
DuraLineSeries, 1080/1180	15 years
Toilet Partition Series not otherwise listed (i.e., TrimLine, Designer, ClassicSeries)	1 year

Hardware for all series of Bobrick toilet partitions is warranted to be free from defects in workmanship and material under normal usage service for one year from the date of purchase. (Rust and discoloration to stainless steel parts resulting from exposure to harsh environmental and/or chemical conditions are not considered to be defects in workmanship or material and there is no expressed or implied warranty provided for such condition. Refer to Bobrick Advisory Bulletin TB-21, Effective Ways to Clean Stainless Steel.)

#### Limitations on Warranties

In all instances, the purchaser's exclusive remedy against Bobrick is for the repair or replacement, at Bobrick's option, of warranted defective products or parts. Bobrick will also bear the cost of the purchaser's return of defective products or parts to Bobrick. Bobrick's warranties set forth above do not cover damage resulting from vandalism. No other remedy (including, but not limited to, damages for field labor charges, lost profits, lost sales, injury to persons or property or any other incidental or consequential losses) is available.



**BUILDING VALUE SINCE 1906**

**BOBRICK.COM**